

Project Name \_\_\_\_\_

Type \_\_\_\_\_ Quantity \_\_\_\_\_

Specifier \_\_\_\_\_

Full Name \_\_\_\_\_

Company \_\_\_\_\_

Address \_\_\_\_\_

Email \_\_\_\_\_ Phone \_\_\_\_\_




1- 7 X 9" C-Horizontal with Medallions  
 2- 9 X 10" A- Horizontal Bars  
 3-7 X 16" A- Horizontal Bars  
 4-9 X 20" B- Horizontal and Vertical Bars

**Lamping Matrix**

Dimensions			Lamping				
Size	Width x Height	Extension**	Quad Tube Compact Fluorescent	Twin Tube Compact Fluorescent	Biaxial Fluorescent	Incandescent*	Special
1	7 X 9"	4" <b>ADA**</b>	N/A	(1)13BX 2GX7	N/A	(1)60w Incandescent*	Consult Factory Use "SP" Prefix
2	9 X 10"	5 1/2"	(1)Q26 G24q-3	(2)13BX 2GX7	N/A	(1)100w Incandescent*	
3	7 X 16"	4" <b>ADA**</b>	N/A	(2)13BX 2GX7	(1)27BX	(2)60w Incandescent*	
4	9 X 20"	5 1/2"	N/A	N/A	(1)39BX (2)39BX	(3)75w Incandescent*	

\*120V only. Lower wattage incandescent lamps may be substituted.  
 \*\*Complies with maximum 4" extension requirements of the Americans with Disabilities Act

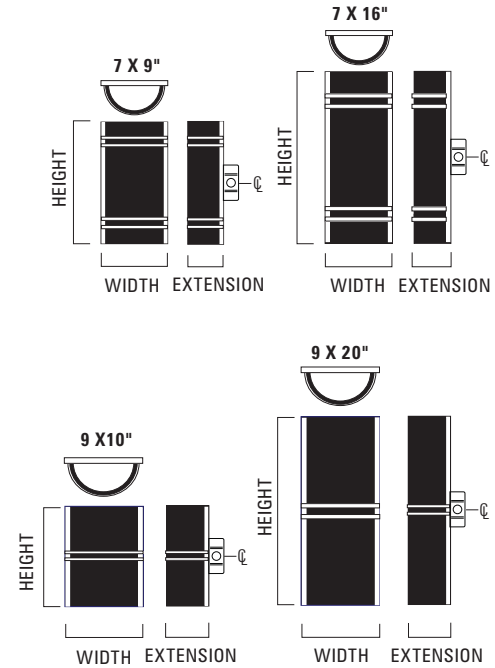

**Ordering Key**

<b>S</b>	<b>6310</b>						
Mounting	Model	Size	Detail	Lamping	Options	Voltage	Finish
S-Sconce X-Special*		1-7 X 9" 2-9 X 10" 3-7 X 16" 4-9 X 20" X-Special* Specify X:	A-Horizontal Bars B-Horizontal & Vertical Bars C-Horizontal Bars with Medallions D-Horizontal Bars with Round Knobs E-Horizontal Bars with Square Knobs X-Special* Specify X:	See Matrix	O-Standard SA-Satin Acrylic <b>Optional Diffusers:</b> TDW-Top White† TDC-Top Clear† BDC-Bottom Clear BDW-Bottom White X-Special* Specify X:	1- 120V 2- 277V 3- 347V* X- Special* Specify X:	WH-White (painted) PB-Polished Brass SB-Satin Brass PN-Polished Nickel SN-Satin Nickel AB-Architectural Bronze X-Special* Specify X:

**Specifications**

**CONSTRUCTION**

Diffuser: pure virgin acrylic  
 Hardware: solid brass and C.R.S.  
 Internals: white powdercoated C.R.S.

**ELECTRICAL**

Quad Lamps: G24q-3, 4-pin base sockets; electronic ballast(s)  
 BX13 Lamps: 2GX7, 4-pin base sockets; electronic ballast  
 BX27 Lamps: 2G11, 4-pin base sockets; electronic ballast  
 BX39 Lamps: 2G11, 4-pin base sockets; electronic ballast  
 Incandescent Lamps: medium base porcelain sockets

**CERTIFICATION**

All units: UL listed dry location  
 Consult factory for damp location and Canadian labeling.

**MOUNTING**

Designed for flat wall surfaces using an octagonal J-Box. J-Box is centered on the fixture frame. Fixtures are intended for mounting with their center point at or slightly above eye-level. For applications where fixtures are mounted significantly lower, or when top is plainly visible (such as in stairwells or multi-story atria) optional top diffuser is recommended. Note that this diffuser will reduce total light output of fixture.

†Available for fluorescent Models only. White Translucent Standard.  
 \*Consult Factory Prior To Specification

**PHOTOMETRICS**

IES Photometric files can be generated upon request.  
 Contact your sales representative.


Note: all finishes are now powder coat




S6310

**Each style shown is available in 4 sizes and in all finishes.**


**A-Horizontal Bars**

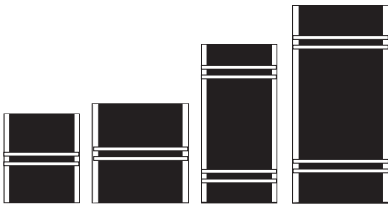

**B-Horizontal Bars & Vertical Bars**

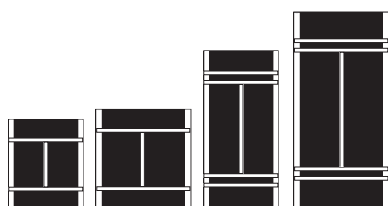

**C-Horizontal Bars  
with Medallions**

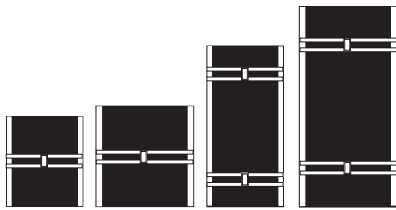

**D-Horizontal Bars  
with Round Knob**

**E-Horizontal Bars  
with Square Knob**

