

Madison Ave Sconces

MAD1
MAD2

Project Name _____

Fixture Type _____

Quantity _____




Madison Ave Single Sconce
MAD1-WM-BA-CS




Madison Ave 2 Light Sconce
MAD2-WM-PA-CS

MAD1

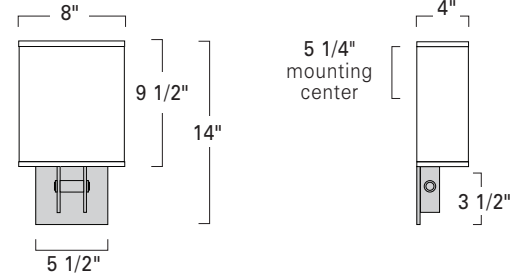

MAD2

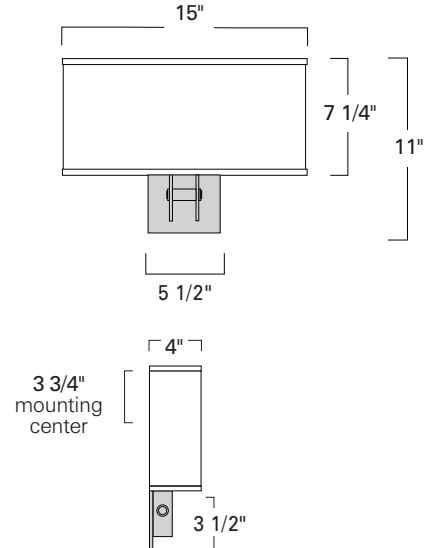

LED- ADA

Product Name / Model / Dimensions				Mounting Options	Diffuser Options	Finish Options	Lamping Options
Madison Ave Single Sconce / MAD1 Madison Ave 2 Light Sconce / MAD2				Standard Wall Mount / WM Junction box behind shade	Standard Cream Linen Shade / CS	Standard Brushed Aluminum / BA Polished Aluminum / PA Premium Brushed Nickel / BN Polished Nickel / PN	Standard LED / LED MAD1 1296lm 3000K CCT, 80 CRI 22 Watts; 120v or 277v ELV dimmable (must specify 277v) MAD2 1296lm 3000K CCT, 80 CRI 22 Watts; 120v or 277v ELV dimmable (must specify 277v) Optional Incandescent / IN MAD1- (1) 60W max candelabra MAD2 - (2) 60W max candelabra
Series	Height	Width	Projection				
MAD1	14.00"	8.00"	4.00"				
MAD2	11.00"	15.00"	4.00"				

Note: All finishes are now powder coat

2_2021

Dry Location Rated and UL/ETL Listed

DISCLAIMER:

ILEX Architectural Lighting reserve the right to change specifications related to its product at anytime. USA Made indicates product is manufactured in Michigan facility. Phone: 269-247-1252